


## Water-cooled Bubbler

- Excellent Water Cooling Capacity
- Immersion between 150-1000mm
- Flow Capacity: 50-800 l/h
- Nickel free

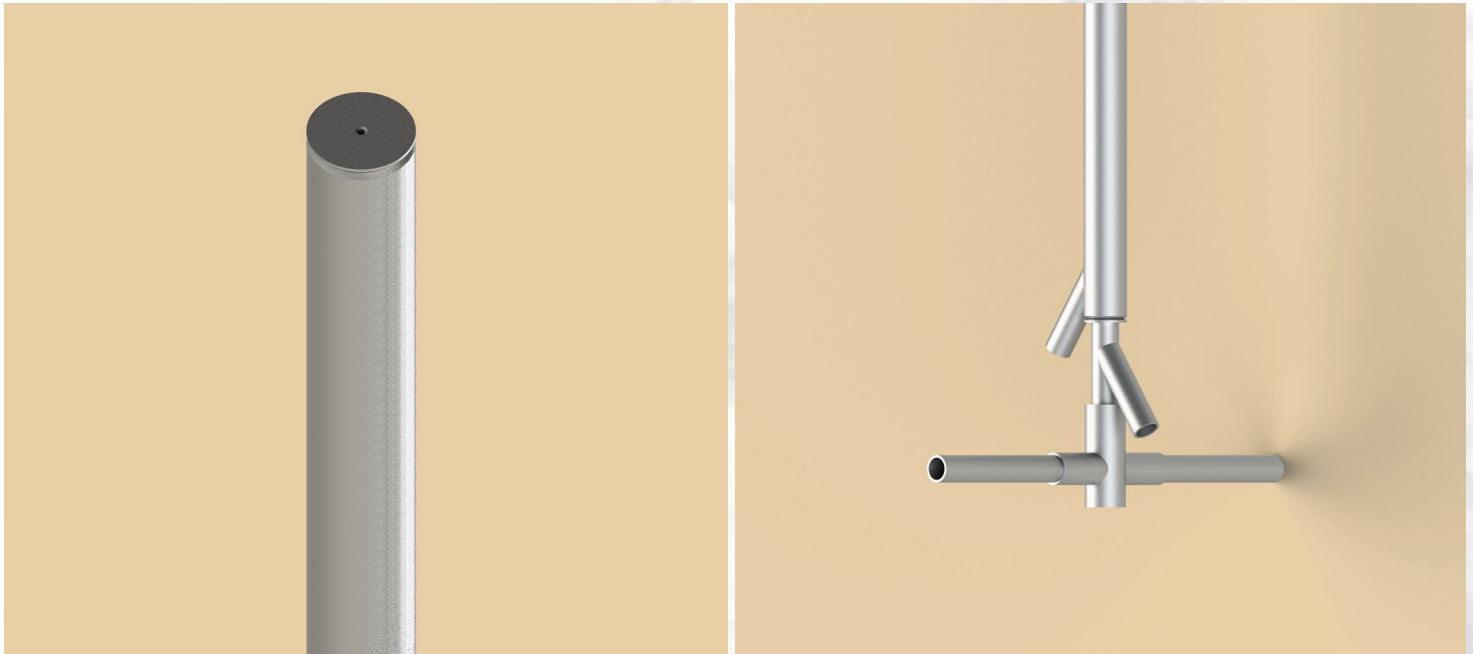

Water Cooled Bubblers are widely used throughout the glass industry.

With an outer diameter for 42mm, the Water-Cooled Bubbler can be installed as batch barrier as well as regular bubbler, being immersed into the glass from 150mm to 1000mm depending on the clients operational needs. Water Cooled Bubblers can be installed without dedicated Bubbler Block and thus allow a Hot replacement and Installation. The Water-cooled design creates a water-cooled plug around the drilled hole, protecting the paving. Depending on the furnace's condition, additional protection measures can be suggested by our specialists.

This Bubbler design does not corrode and does not require periodic advancements such as Ceramic Bubblers.

Our special handle design, allows precise positioning of the Bubbling tube inside the furnace. No additional tool is required.

The Bubbler includes a Holding device and safety chain which presents the slide down of the bubbler in case of emergency

